


# COMCO'S

## All New **LOW-DRAIN** FM 2-WAY RADIO with *Super-Selectivity*

- Only 6 Amps for Stand-by, Total 13 While Transmitting
- Designed especially to operate on Newly Proposed Frequencies
- Mounts up Front on Fire Wall
- Works with Any Battery Polarity without Alteration
- Built Specifically for Rugged Police Service
- Most Economical to Maintain and Operate

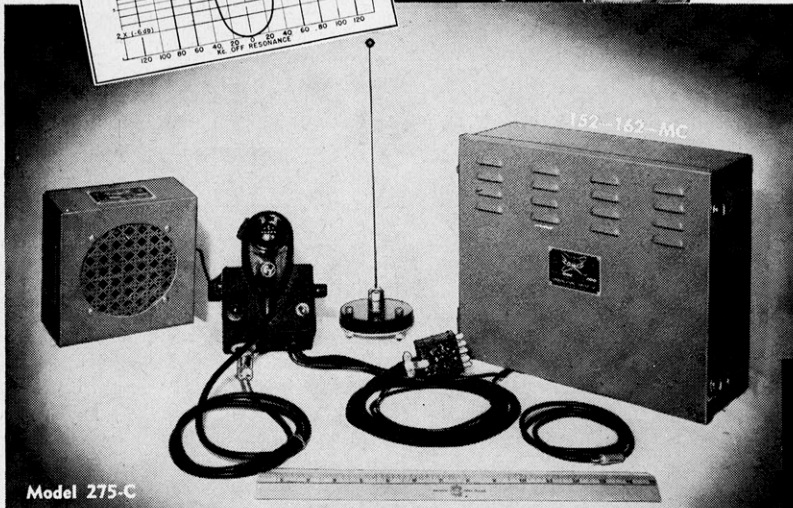

Model 275-C



Manufacturers of Radio and Electronic Equipment  
**COMMUNICATIONS COMPANY, Inc.**  
CORAL GABLES, MIAMI 34, FLORIDA

**WRITE FOR DESCRIPTIVE FOLDER >>>**

### INDIANA

(Continued)

Conference at Houston, and if unable to attend, he has power to designate an alternate. President Evans stated he would be unable to attend due to pressure of his work and appointed Zellon E. Audritsh as alternate.

The meeting was adjourned at 5:30 P.M. and a delicious fish dinner with all the trimmings was served by Madison Lodge, No. 48, Fraternal Order of Police.

At 6:30 P.M. Capt. Al Titus of the Anderson Police introduced Brook Short, Chief Engineer of Delco-Remy Co., at Anderson. Mr. Short and his assistants gave a very interesting program of illustrated lectures and demonstrations on different types of generators, and went into detail on the voltage controls used.

R. B. JONES,  
Secretary-Treasurer

### WANTED

Surplus 30-40 mc equipment that has been replaced with the new FM units. Will buy complete lots or individual units. Advise make, model and condition.

**E A SUPPLY CO.**  
687 W. Lexington Ave. Elkhart, Ind.

### BE SURE YOU'RE "ON FREQUENCY"

✓ *Check with Browning*

Accurate to 0.0025% of specified frequency, Browning frequency meters are dependable, easy to use, compact, sturdy — ideal for police radio service. There's a model for your need; see list below.

*The calibration of all Browning frequency meters can be checked in the field. You know you are right when you check with Browning.*

- S-4** one to five frequencies from 1.5 to 70 mc. FM or AM; aural and visual indication of zero beat.
- S-5** one to three frequencies from 30 to 500 mc; crystal frequency stability allows extended use where it is inconvenient to check WWV signals.
- S-7** one or two frequencies in 72-76 and/or 152-162 mc. bands; aural and visual indication of zero beat.

### WWV STANDARD FREQUENCY CALIBRATOR MODEL RH-10

... enables you to utilize WWV's standard signal on 5 and 10 mc. and to select either 440- or 4000-cycle modulation for your frequency checks. Sensitivity is better than 1/2 microvolt for strong, steady output. A valuable aid to your frequency standardization.



Write for bulletins fully describing the instruments you need.



**BROWNING**  
Laboratories, Inc.  
Winchester, Mass.

ENGINEERED FOR ENGINEERS